

Danavox Astro PRO SP

XG



Model**	XG998-DWHC*	XG798-DWHC	XG598-DWHC	XG498-DWHC
Device Configurations				
Battery size 98-DWHC	Rechargeable Lithium-Ion			
Control Options	TapControl Push button Multi-Function button Telecoil			
IP Classification	IP68			
Audiological Features				
Channels	17	14	12	12
360 All-Around	●	–	–	–
All Access Directionality	–	●	●	–
Binaural Directionality III	–	–	–	●
Clear Focus	●	–	–	–
Front Focus	–	●	–	–
Ultra Focus	–	–	●	–
Spatial Sense	●	●	●	●
Autoscope Adaptive Directionality (w/Adjustable Directional Mix)	●	●	●	●
Synchronised Soft Switching	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Fixed Directionality	●	●	●	●
Environmental Optimizer II	●	–	–	–
Environmental Optimizer I	–	●	●	●
Noise Tracker II	5 Settings	4 Settings	3 Settings	2 Settings
Wind Guard	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Expansion	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shaper	●	●	●	●
DFS Ultra III (w/Music Mode)	●	●	●	●
Synchronised Acceptance Manager	●	●	●	●
Low frequency Boost	●	●	●	●
Amplification Strategy (WDRC/Semi-Linear/Linear)	●	●	●	●
Tinnitus Sound Generator	●	●	●	●
Functional Features				
Ear-to-Ear Communication	●	●	●	●
MultiConnect	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS*** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
BeMore app	●	●	●	●
Sound Enhancer (BeMore app)	●	–	–	–
Online Services				
Remote Fine Tuning	●	●	●	●
Live Assist	●	●	●	●
Remote Firmware Updates	●	●	●	●
Fitting Features				
Fitting Software XE BeMore 2.2 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●

* XGX98-DWHC has the capability to change the feature set from the highest level to the other price points for demo purposes.
** Availability of models may vary by country.
*** MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



Desktop charger
Charging form factor (CFF 90)



© 2025 GN Hearing A/S. All rights reserved. DANAVOX is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

GN Hearing A/S
Lautrupbjerg 7
DK-2750 Ballerup
Denmark
Tel.: +45 4575 1111
resound.com

GN Hearing India Private Limited,
NMS TITANIUM
4th Floor, Office No 401-408,
Plot No. 74, Sector No.15,
CBD Belapur,
Navi Mumbai - 400614

Technical Specifications

		XG98-DWHC - Metal hook	
		ANSI S3.22-2014 IEC 60118-0:2022 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	54	dB
Full-on gain (50 dB SPL input)	Max. HFA	84 69	dB
Maximum output (90 dB SPL input)	Max. HFA	140 131	dB SPL
Total harmonic distortion	500 Hz	6.8	%
	800 Hz	1.0	
	1600 Hz	0.4	
Full-on SPLIV @ 10mA/m	Max.	132	dB SPL
HFA-SPLIV @ 31.6 mA/m	HFA	114	
Full-on HFA-SPLIV @ 10mA/m	HFA	118	
Equivalent input noise, w/o Noise reduction		26	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	dB SPL
Frequency range		<200 - 5250	Hz
Battery Lifetime (Battery type Rechargeable)*		28 (max) 24 (typical)	Hours

* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.



Technical Specifications

		XG98-DWHC - Plastic hook**	
		ANSI S3.22-2014 IEC 60118-0:2022 JIS C 5512: 2015 2cc coupler	
Reference test gain (60 dB SPL input)	HFA	54	dB
Full-on gain (50 dB SPL input)	Max. HFA	79 67	dB
Maximum output (90 dB SPL input)	Max. HFA	140 131	dB SPL
Total harmonic distortion	500 Hz	4.8	%
	800 Hz	0.7	
	1600 Hz	0.4	
Full-on SPLIV @ 10mA/m	Max.	127	dB SPL
HFA-SPLIV @ 31.6 mA/m	HFA	113	
Full-on HFA-SPLIV @ 10mA/m	HFA	116	
Equivalent input noise, w/o Noise reduction		24	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	7	dB SPL
Frequency range		<200 - 5330	Hz
Battery Lifetime (Battery type Rechargeable)*		28 (max) 24 (typical)	Hours



* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment. Maximum number includes no streaming; typical number includes several hours of streaming.

** Optional: Plastic hook version of XG98-DWHC models are configured in fitting software with the plastic hook accessory.



Patents pending.

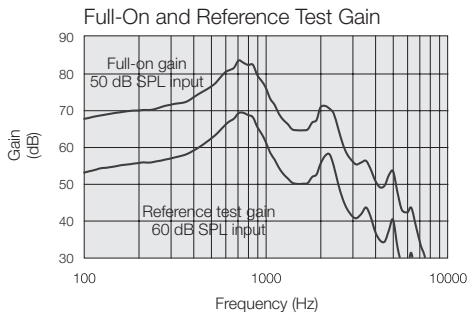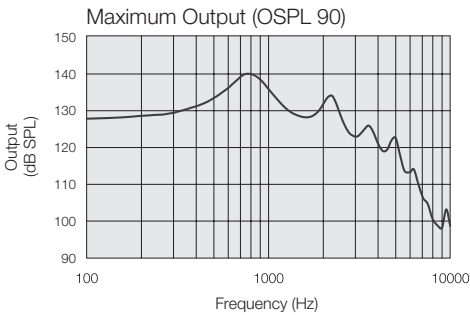

Patents pending.

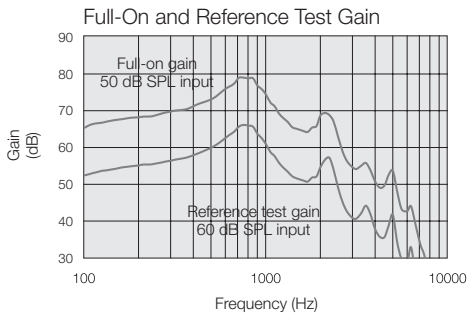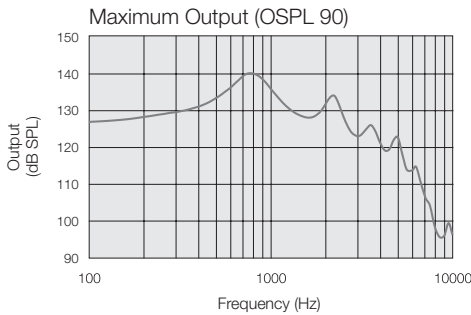

All specifications are subject to change without notice.

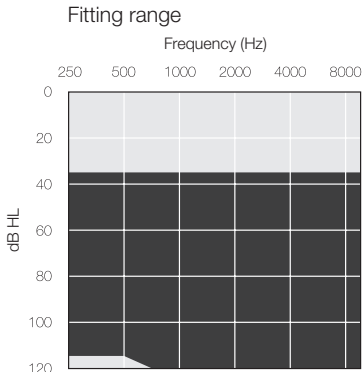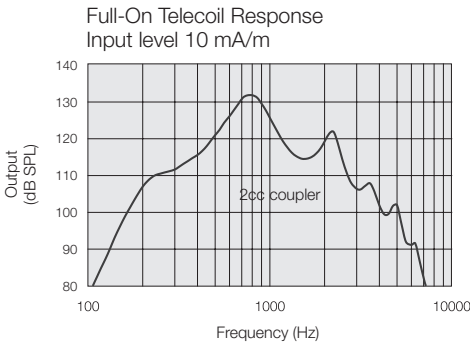

All specifications are subject to change without notice.

